

General Series SLA Battery

General Series

General Series Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for common power backup system applications widely used in the field of UPS, Emergency Lighting System.

Application

Alarm System	Medical Equipment
Cable Television	UPS
Communication Equipment	Power tools
Control Equipment	Emergency Power System
Security System	Toys




General Features




Sealed and maintenance free operation.
Non-Spillable construction design.
ABS containers and covers(UL94HB, UL94V-0) optional.
Safety valve installation for explosion proof.
High quality and high reliability.
Exceptional deep discharge recovery performance.
Low self discharge characteristic.
Flexibility design for multiple install positions.

Construction

Component	Raw material	Sealant	Epoxy Resin
Positive	Lead dioxide	Safety valve	EPDR
Negative	Lead	Terminal	Copper
Container	ABS	Separator	Fiber glass
Cover	ABS	Electrolyte	Sulfuric acid

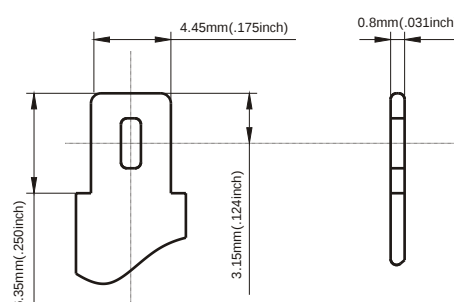


Terminal Dimensions

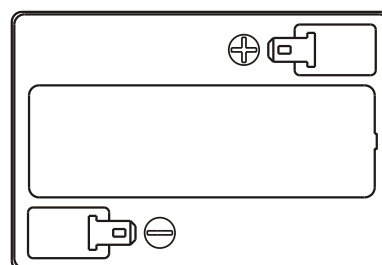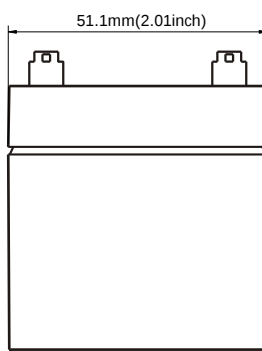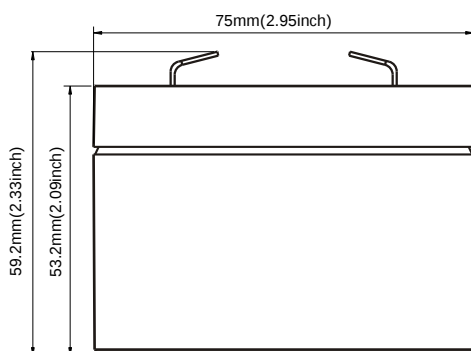

Battery Model	GB6-2			
Designed Floating Life	5 Years			
Capacity(25°C)	20HR(0.1A,1.75V)	10HR(0.19A,1.75V)	5HR(0.34A,1.75V)	1HR(1.3A,1.75V)
	2.0AH	1.9AH	1.7AH	1.3AH
Dimensions	Length	Width	Height	Total Height
	75mm(2.95inch)	51.1mm(2.01inch)	53.2mm(2.09inch)	59.2mm(2.33inch)
Approx. Weight	0.47Kg (1.04 lbs)			
Internal Resistance	Full charged at 25°C: 0.015 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	7.2-7.5V(-15mV/ °C), max. Current: 0.6A		6.8-6.9V(-10mV/ °C)	

General Series SLA Battery

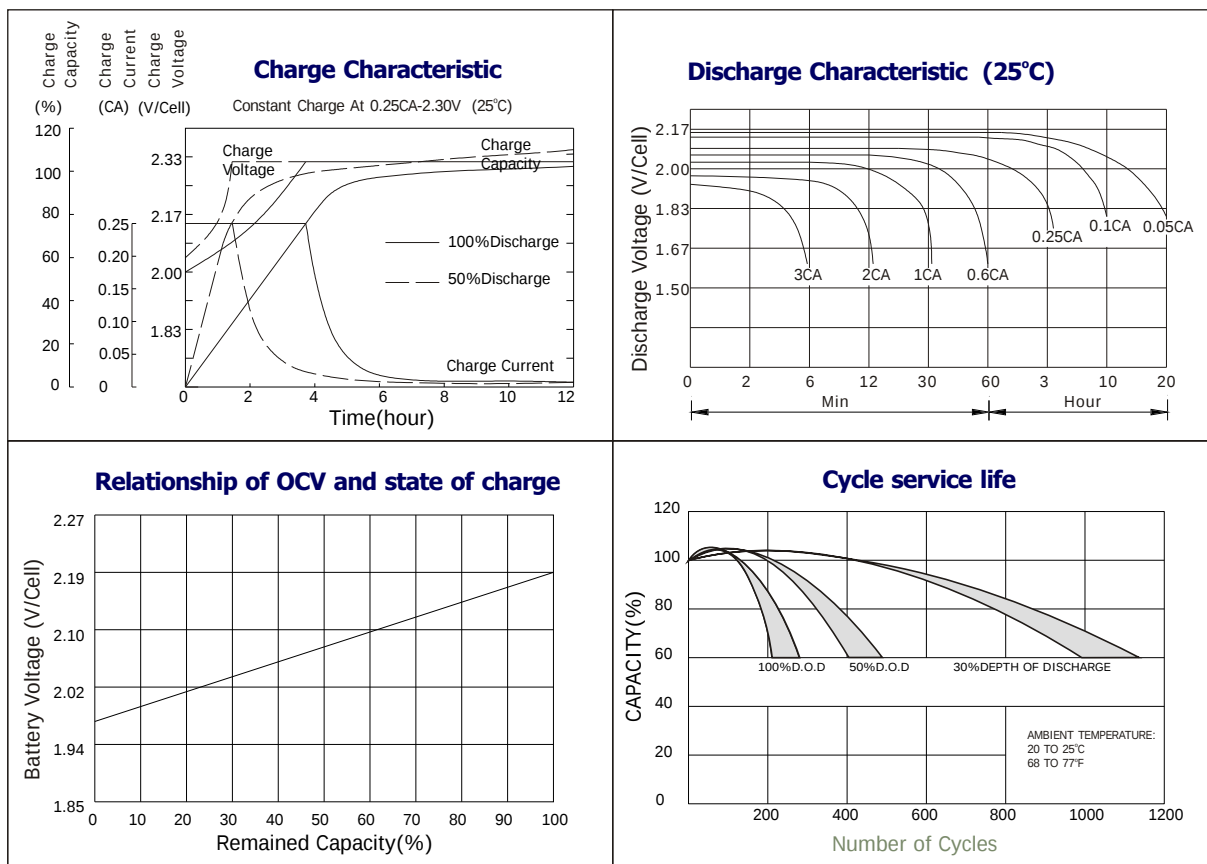

Constant current discharge ratings-amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60V	8.20	5.10	3.85	2.35	1.49	0.66	0.40	0.22	0.12
1.67V	7.70	4.84	3.70	2.25	1.47	0.63	0.39	0.22	0.11
1.70V	7.06	4.67	3.62	2.04	1.43	0.59	0.38	0.22	0.11
1.75V	6.92	4.52	3.50	1.94	1.36	0.57	0.38	0.22	0.11
1.80V	6.19	4.32	3.18	1.80	1.27	0.55	0.35	0.22	0.11
1.85V	5.46	4.11	2.86	1.65	1.19	0.53	0.33	0.21	0.10

Constant power discharge ratings-watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60V	14.4	9.22	7.03	4.23	2.69	1.16	0.68	0.45	0.24
1.67V	13.9	8.98	6.94	4.14	2.68	1.13	0.67	0.45	0.23
1.70V	13.1	8.90	6.88	3.88	2.63	1.08	0.67	0.44	0.22
1.75V	13.2	8.87	6.83	3.76	2.58	1.05	0.66	0.44	0.22
1.80V	12.0	8.74	6.33	3.59	2.43	1.02	0.64	0.43	0.21
1.85V	10.9	8.29	5.74	3.36	2.29	0.99	0.62	0.43	0.20

