

Gel Series SLA Battery

GEL Plus Batteries

The GEL Plus range of gel technology batteries offers outstanding performance including a 15+ years design life. The GEL Plus batteries is designed based on the LSE series, using the polymer gel electrolyte. Built to the highest standards and compliant with the latest IEC60896- 21/ 22 standard. this range also offers 100% capacity out- of- the- box and is capable of handling deep discharges for complete peace of mind. The use of flexible connectors and the ability to be installed both horizontally and vertically allows for multiple installation possibilities.



Application


- Correspondence exchange and transmission system
- Mobile communication system
- Power plant and power transformer system
- Radio and broadcasting station
- Navigation and signaling system
- Emergency power system
- UPS
- Other spare, circulatory system

General Features



- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction

- | | | | |
|-----------|-------------------|--------------|------------------------------------|
| Component |Raw material | Sealant |Epoxy Resin |
| Positive |Lead dioxide | Safety valve |EPDR |
| Negative |Lead | Terminal |Copper |
| Container |ABS | Separator |Macromolecule polymer |
| Cover |ABS | Electrolyte |sulfuric acid thixotropic Gel |

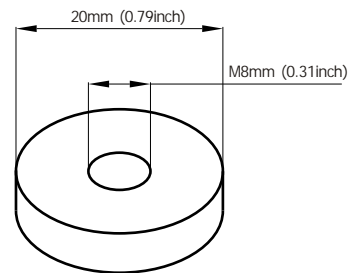


Terminal Dimensions

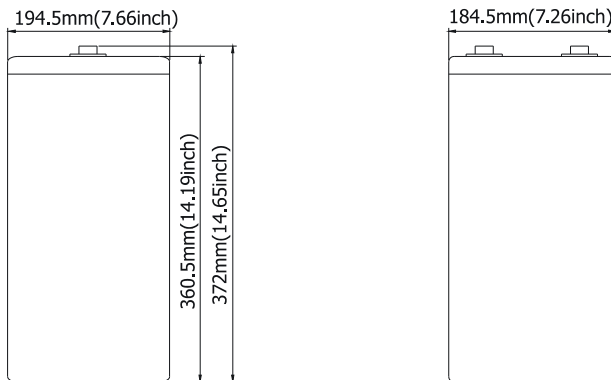

Battery Model	GELPlus2-500			
Designed Floating Life	15 Years			
Capacity(25°C)	20HR(25.8A,1.75V)	10HR(50A,1.75V)	5HR(90A,1.75V)	1HR(275A,1.75V)
	516AH	500AH	450AH	275AH
Dimensions	Length	Width	Height	Total Height
	194.5mm(7.66inch)	184.5mm(7.26inch)	360.5mm(14.19inch)	372mm(14.65inch)
Approx. Weight	31.3Kg (69.02 lbs)			
Internal Resistance	Full charged at 25°C: 0.00033 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.3V-2.35V(-5mV/ °C), max. Current: 125A		2.25-2.27V(-3.3mV/ °C)	

Gel Series SLA Battery

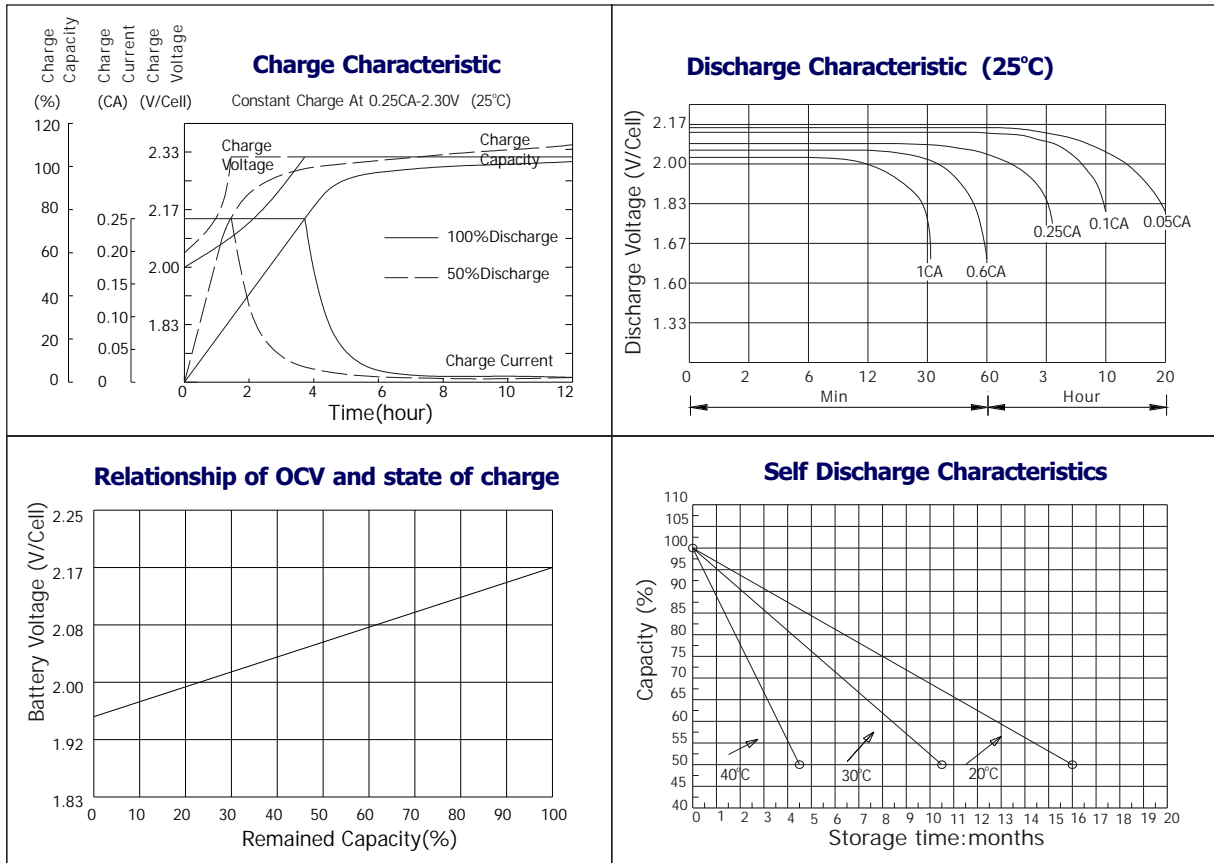

Constant current discharge ratings - amperes at 25 C

End Voltage	Time	5min	15min	30min	60min	2hour	3hour	5hour	6hour	8hour	10hour	24hour
1.60V		833	698	517	327	193	141	95.8	82.7	65.9	54.7	24.7
1.65V		770	651	495	310	188	138	93.5	81.6	65.0	54.2	24.6
1.70V		719	610	455	296	181	134	92.7	80.5	63.9	53.4	24.5
1.75V		686	578	423	282	175	130	90.1	79.2	63.1	52.6	24.2
1.80V		660	545	396	264	167	126	88.0	77.2	61.9	51.4	23.8
1.83V		614	511	377	248	160	122	85.9	75.8	60.8	50.3	23.3
1.85V		584	483	353	239	151	119	85.0	74.7	60.1	50.0	23.0
1.88V		543	440	332	229	148	117	84.2	73.7	59.4	49.6	22.8
1.90V		502	408	303	212	142	112	81.9	72.0	57.8	48.3	22.5
1.94V		452	364	268	188	128	103	75.8	66.8	54.1	45.5	21.8

Constant power discharge ratings - watts at 25°C

End Voltage	Time	5min	15min	30min	60min	2hour	3hour	5hour	6hour	8hour	10hour	24hour
1.60V		1417	1186	945	673	434	322	213	185	142	116	52.2
1.65V		1347	1139	894	622	399	302	205	176	137	113	51.2
1.70V		1295	1098	871	592	387	291	201	172	134	110	50.2
1.75V		1255	1057	842	569	373	281	196	168	129	108	49.7
1.80V		1220	1007	812	556	366	271	190	163	125	106	49.0
1.83V		1153	961	766	536	352	264	186	158	123	104	48.3
1.85V		1110	917	722	506	337	256	181	155	121	102	47.0
1.88V		1048	850	671	475	313	248	175	149	118	99.8	45.8
1.90V		979	796	609	436	292	238	169	145	114	94.9	44.1
1.94V		885	713	546	386	270	221	160	139	109	90.8	43.6

