

Solar Series SLA Battery

Solar Series

Bosfa Solar Series Valve-regulated Lead Acid batteries use particular alloy and material technology design to ensure a excellent performance in various environments, especially high and low temp. Bosfa Solar series batteries is optimal for storage and conversion of photovoltaic energy and wind energy.

Application


Photovoltaic system
Alternative Energy System
Electric Utility
Outdoor control Equipment
Railroad Utility

General Features



Sealed and maintenance free operation.
Non-Spillable construction design.
ABS containers and covers(UL94HB, UL94V-0) optional.
Safety valve installation for explosion proof.
High quality and high reliability.
Exceptional deep discharge recovery performance.
Low self discharge characteristic.
Flexibility design for multiple install positions.

Construction

Component	Raw material	Sealant	Epoxy Resin
Positive	Lead dioxide	Safety valve	EPDR
Negative	Lead	Terminal	Copper
Container	ABS	Separator	AGM
Cover	ABS	Electrolyte	sulfuric acid

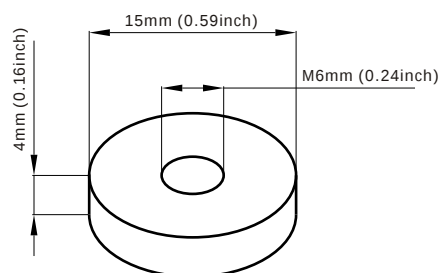


Terminal Dimensions

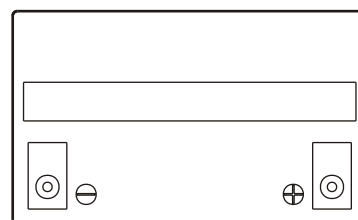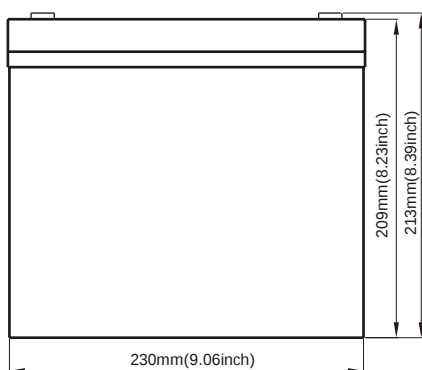

Battery Model	Solar 12-50			
Designed Floating Life	8 Years			
Capacity(25°C)	20HR(2.55A,1.75V)	10HR(5.0A,1.75V)	5HR(8.5A,1.75V)	1HR(32.5A,1.75V)
	51AH	50AH	42.5AH	32.5AH
Dimensions	Length	Width	Height	Total Height
	230mm(9.06inch)	138mm(5.44inch)	209mm(8.23inch)	213mm(8.39inch)
Approx. Weight	16.5Kg (36.38 lbs)			
Internal Resistance	Full charged at 25°C: 0.0058 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15V(-30mV/ °C), max. Current: 12.5A		13.6-13.8V(-20mV/ °C)	

Solar Series SLA Battery

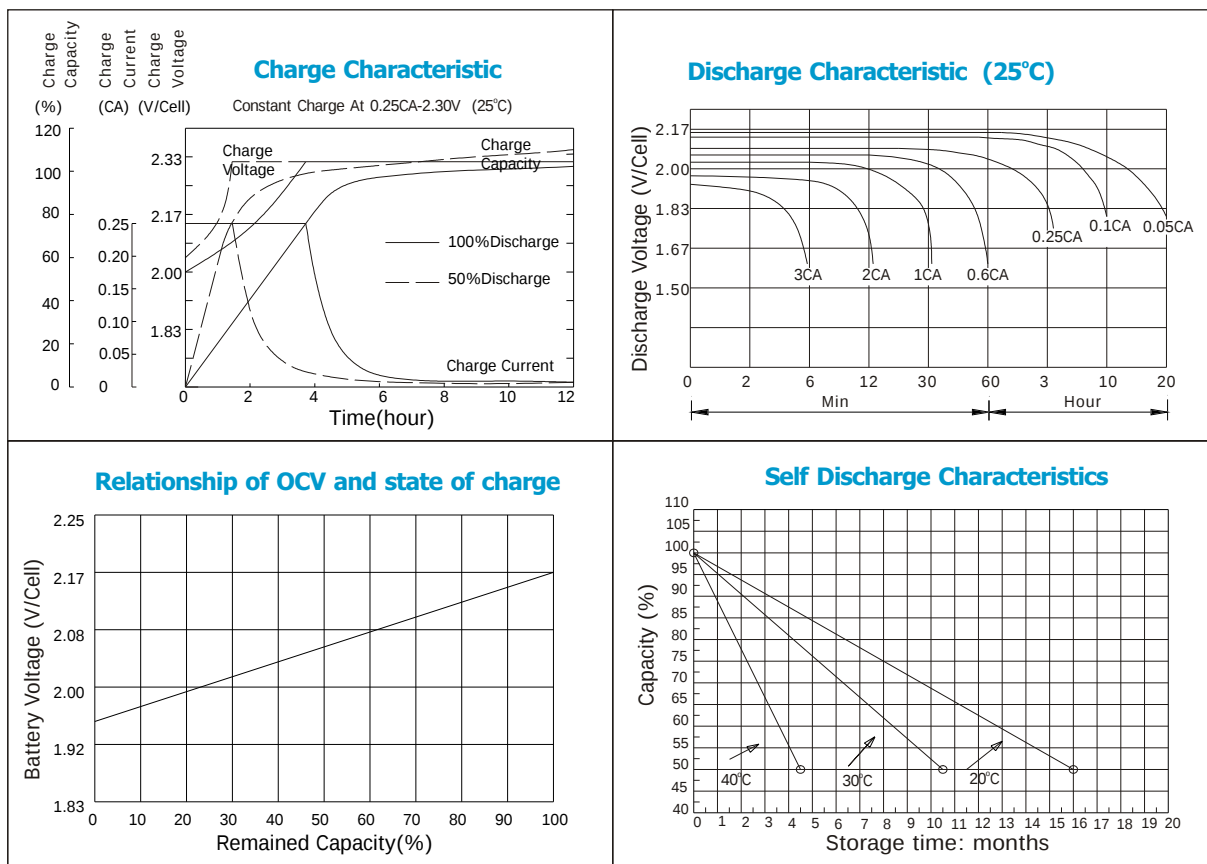

Constant current discharge ratings-amperes at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	236	147	111	67.6	39.8	17.5	10.7	5.71	3.09
1.67V	222	139	107	64.7	39.3	16.8	10.5	5.66	2.98
1.70V	203	134	104	58.8	38.1	15.7	10.2	5.63	2.93
1.75V	199	130	101	55.9	36.3	15.2	10.0	5.61	2.85
1.80V	178	124	91.6	51.8	34.0	14.6	9.41	5.50	2.78
1.85V	157	118	82.4	47.6	31.7	14.0	8.8	5.43	2.72

Constant power discharge ratings-watts at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	415	266	203	122	71.8	31.0	18.0	11.7	6.00
1.67V	400	259	200	119	71.4	30.0	18.0	11.6	5.91
1.70V	377	256	198	112	70.0	28.7	17.7	11.5	5.82
1.75V	379	255	197	108	68.8	28.0	17.6	11.3	5.70
1.80V	347	252	182	103	64.9	27.2	17.0	11.2	5.62
1.85V	315	239	165	96.8	61.0	26.4	16.5	11.0	5.53

